

DUMP BODY




HilBilt[®]

QUALITY THAT WORKS

D U M P



- The standard cab protector installation is designed to truly protect the truck. It is constructed of 10 gauge Hi-Tensile steel with angle bracing for maximum strength.
- HilBilt uses Parker (Commercial) front mounted telescopic hoists that provide high dump angle, short cycle time, and trouble free service.
- The side top rail is a 3" square tube that provides additional strength and rigidity versus a formed section top rail.
- Bodies available in single, tandem, and tri-axle models.

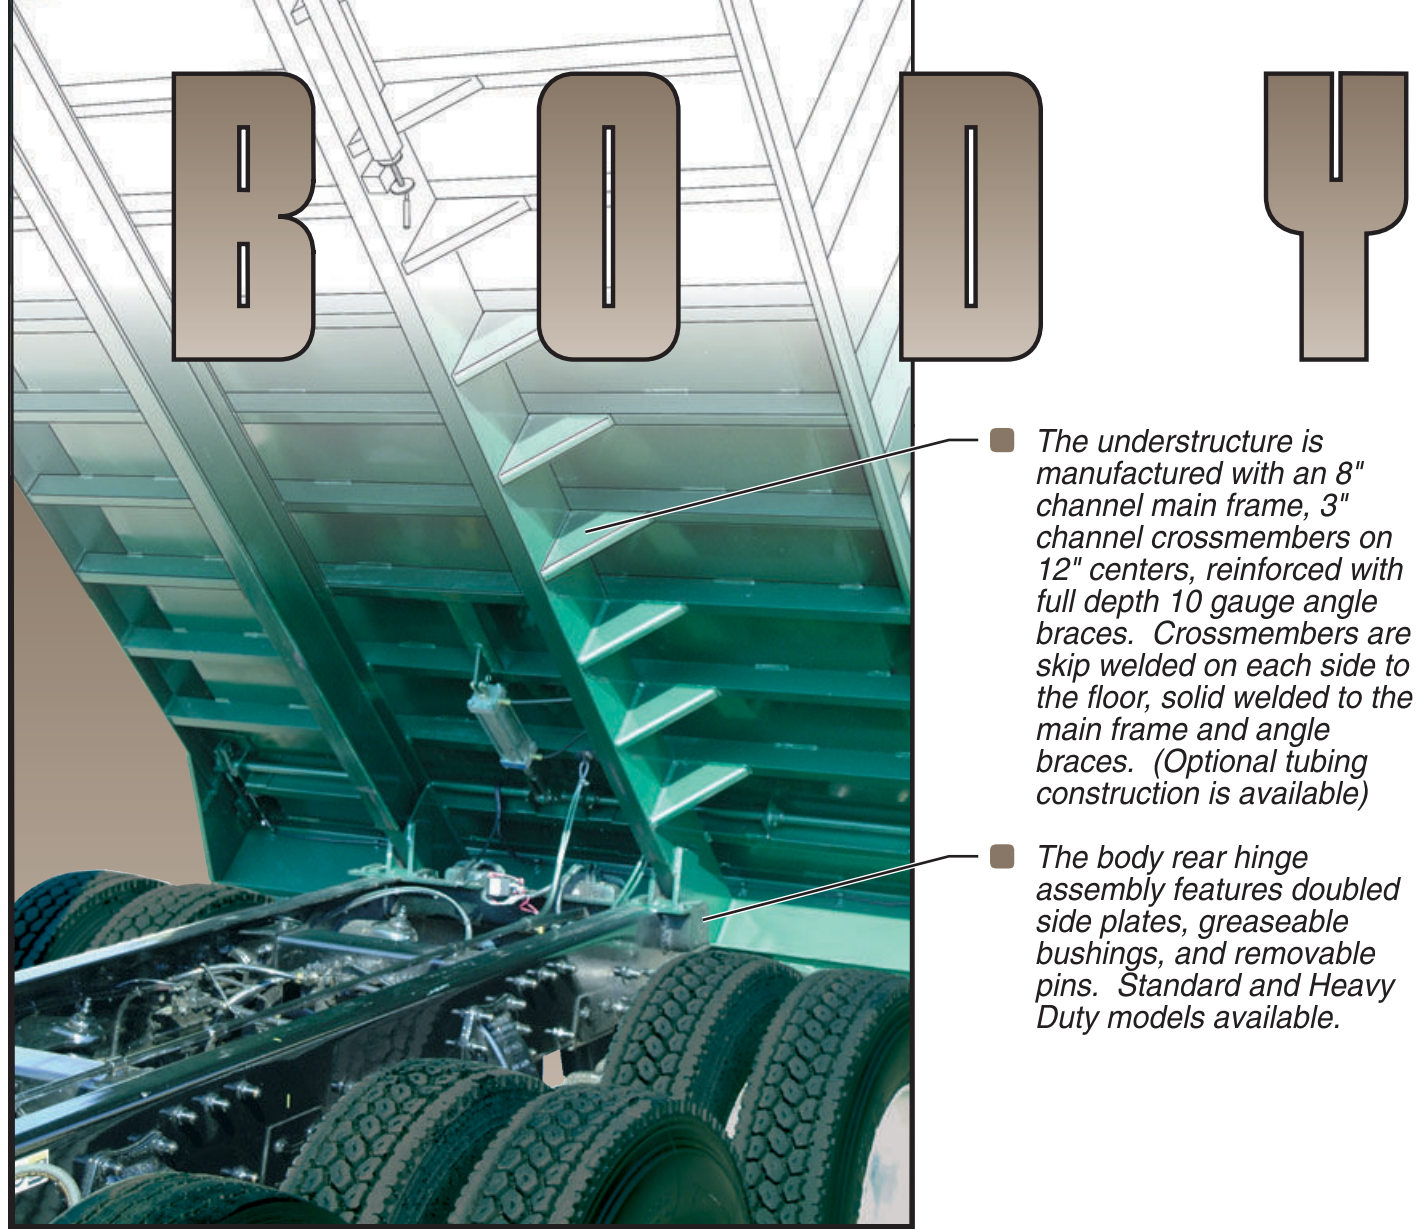

B O O D Y

- The understructure is manufactured with an 8" channel main frame, 3" channel crossmembers on 12" centers, reinforced with full depth 10 gauge angle braces. Crossmembers are skip welded on each side to the floor, solid welded to the main frame and angle braces. (Optional tubing construction is available)
- The body rear hinge assembly features doubled side plates, greaseable bushings, and removable pins. Standard and Heavy Duty models available.

■ HilBilt dump bodies are designed to meet your construction hauling needs. All bodies feature Hi-Tensile steel (50,000-psi minimum yield), full depth rear bumpers and full depth rear corner posts. Our paint process includes shot blasting, degreasing, priming, and two coats of acrylic enamel paint, which provides a durable and attractive finish. To insure maintenance free service all bodies come standard with Truck Lite "sealed beam" DOT approved lighting.

The upper tailgate hinge is built of 3/4" T1 steel hinge arms, 3/16" Hi-Tensile steel side plates, three T1 steel hardened bushings, and a removable pin designed to grease all three bushings. This design insures long life and easy service.

The tailgate latch assembly is constructed with a 5/8" T1 steel latch arm; six greaseable pivot points, and operated with a 2.5" double acting air cylinder. A break-over-center feature secures the tailgate in the closed position.



DUMP BODY

SPECIFICATIONS

MODEL	CA-CT Required	Cap./Yds.	Hoist	Side Height From Floor	Tailgate Height From Floor	Dump Body Box Weight	Wet Line Kit Weight
Single Axle							
9-5	72"	5	5375	21	27	1780	595
9-6	72"	6	5375	25	31	1880	595
10-6	84"	6	5390	23	29	2090	605
10-8	84"	8	5390	30	36	2210	605
Tandem Axle							
12-12	84"	12	63111	39	45	2750	665
13-12	102"-108"	12	63123	35	41	2980	750
14-12	120"	12	63123	33	39	3215	750
15-12	126"-132"	12	63123	32	38	3440	750
13-14	–	14	63123	39	45	3200	750
14-14	–	14	63123	36	42	3415	750
15-14	–	14	63123	33	38	3645	750
Tri-Axle							
13-15	–	15	63123	47	53	3275	750
14-15	–	15	73124	42	48	3495	850
15-15	–	15	73124	39	45	3730	850
16-15	–	15	73140	36	41	3985	885

• All floors, fronts, sides, and tailgates are 10 gauge, hi-tensile steel, standard. Inside widths of all bodies is 89 1/2".

• Other options are available.



DISTRIBUTOR:

For questions or to place an order, please contact HAWKEYE TRUCK EQUIPMENT at 515-289-1755 or 1-800-622-8223.