

SL SL SERVICE BODY



— NO BODY BETTER —

For questions or to
place an order, contact
HAWKEYE TRUCK EQUIPMENT
at 515-289-1755 or 1-800-622-8223.



Made in
the USA



SL SERVICE BODY
ECONOMICAL QUALITY

SL STANDARD FEATURES



Body shown with optional equipment.

- 1 **Stainless Steel Rotary Locks** – Attractive appearance with no exposed fasteners; rust resistant. Features a double-bitted, high-quality locking cylinder; adjustable striker pins; and an O-ring seal to prevent water intrusion.
- 2 **Exclusive Dual-Pro® Seal System** – Large, automotive quality bubble-type seal and mechanical seal provide a dual line of defense against weather. Patented design increases clear door openings in every compartment of the body.
- 3 **Stainless Steel Bolt-On Block Hinges**
- 4 **Seamless Wheelhouse Panel**
- 5 **Incandescent Stop, Tail, Turn and Clearance Lights**

- 6 **Slam Action Tailgate with Diamond Pattern Facer and Stainless Steel Knee Brace Hardware**
- 7 **Standard Shelf and Divider Equipment** – All shelves and dividers are removable and adjustable.
- 8 **Aluma-Fill®** – Fuel Receptacle protects the body and finish from accidental nicks and scratches

STANDARD FEATURES NOT PICTURED

- E-Coat Priming Process
- Galvannealed Steel Floor
- Full-Height Reinforced Bulkhead



SPECS





SL SERVICE BODY AND LOW-PROFILE SERVICE BODY

- Body-specific pooched bumper available for 98" model
- Standard 92" pooched bumper on 108" and 132" models
- Choice of white or red powder coat finish, inside and out
- Optional bolt-on masterlocking – not installed. Available for SL standard body, not the Low-Profile model

DIMENSIONAL DATA FOR THE 98 AND THE 108



Model	Approx. Weight	Cab-to-Axle	A	B	C	D	E	F	G	Approx. Compartment Clear Door Openings			Rear View			
										H	I	J	K	L	M	N
SLU98-SWs	1135 lbs.	56"	28"	47"	23"	98"	40"	11"	19"	22.5" x 33.75"	45.5" x 12.75"	17.5" x 33.75"	23.75"	14.5"	48.5"	77.5"
SLULP98-SWs	1050 lbs.	56"	28"	47"	23"	98"	35"	8.25"	14"	22.5" x 28.75"	45.5" x 7.75"	17.5" x 28.75"	18.75"	14.5"	48.5"	77.5"
SLU108-DW	1405 lbs.	60"	33"	47"	28"	108"	40"	11"	19"	27.5" x 33.75"	45.5" x 12.75"	22.5" x 33.75"	23.75"	21.5"	50"	93.25"
SLULP108-DW	1340 lbs.	60"	33"	47"	28"	108"	35"	8.25"	14"	27.5" x 28.75"	45.5" x 7.75"	22.5" x 28.75"	18.75"	21.5"	50"	93.25"

Notes: s Equipped with spring shackle offsets (see diagram). Contact your Reading Distributor for dimensions.

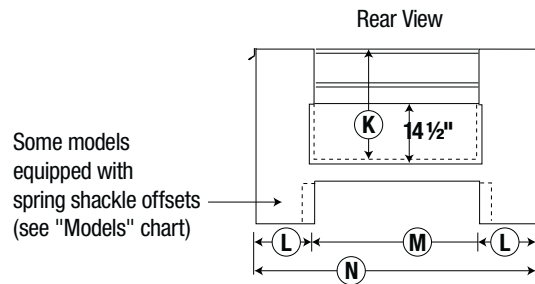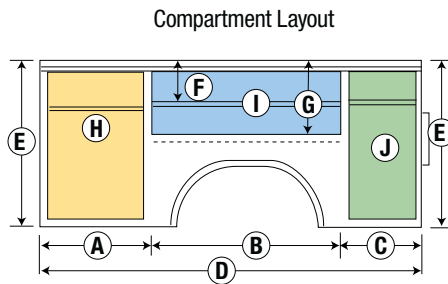


DIMENSIONAL DATA FOR THE 132

Model	Approx. Weight	Cab-to-Axle	A	B	C	D	E	F	G	H	Approximate Compartment Clear Door Openings				Rear View
											I	J	K	L	M
SLU132-DW	1,770 lbs.	84"	36"	21"	47"	28"	132"	40"	19"	11"	27.5" x 33.75"	17.5" x 33.75"	45.5" x 12.75"	22.5" x 33.75"	23.88"
SLULP132-DW	1,670 lbs.	84"	36"	21"	47"	28"	132"	35"	14"	8.25"	27.5" x 28.75"	17.5" x 28.75"	45.5" x 7.75"	22.5" x 28.75"	18.88"

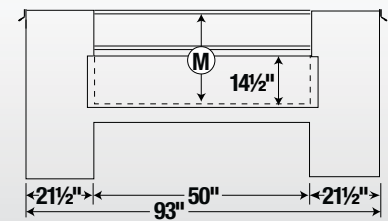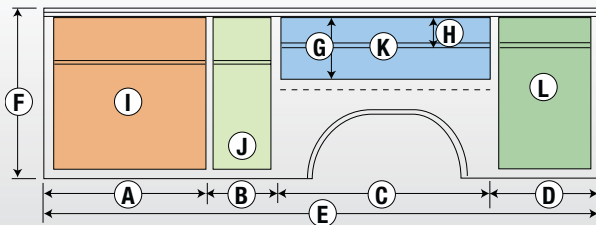

SL BOLT-ON SPACEMAKER BOX ASSEMBLY FOR 98 AND 108 MODELS ONLY

- Top-opening add-on compartments that provides 15% more storage
- Order individually
- Flexibility to open from the street or the load space

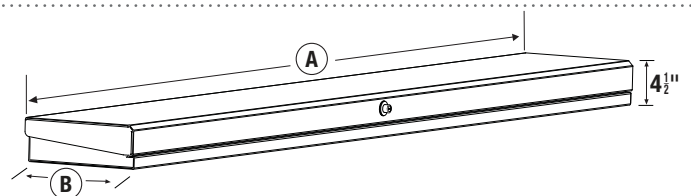



SL SPACEMAKER AND LOW-PROFILE SPACEMAKER BODY


- Top-opening compartments that provide 15% more storage space
- Choice of powder-coated white or aluminum diamond plate (shown) spacemaker lids
- Features two pneumatic props and rotary catches with push-button release
- Optional bolt-on masterlocking – not installed (shown). Available for SL Spacemaker standard body, not the Low-Profile Spacemaker model

DIMENSIONAL DATA FOR THE 98 AND THE 108


Model	Approx. Weight		Cab-to-Axle	A	B	C	D	E	F	G	Approx. Compartment Clear Door Openings			Rear View				
	STL LIDS	AL LIDS									H	I	J	K	L	M	N	O
SLUS98-SWs	1280 lbs.	1225 lbs.	56"	28"	47"	23"	98"	44.25"	19"	11"	22.5" x 33.75"	45.5" x 12.75"	17.5" x 33.75"	23.75"	28.25"	14.5"	48.5"	77.75"
SLUSLP98-SWs	1185 lbs.	1130 lbs.	56"	28"	47"	23"	98"	37.75"	11.75"	5.75"	22.5" x 29.75"	45.5" x 8.75"	17.5" x 29.75"	19.75"	21.5"	14.5"	48.5"	77.75"
SLUS108-DW	1596 lbs.	1506 lbs.	60"	33"	47"	28"	108"	44.25"	19"	11"	27.5" x 33.75"	45.5" x 12.75"	22.5" x 33.75"	23.75"	28.25"	21.5"	50"	93.5"
SLUSLP108 - DW	1500 lbs.	1410 lbs.	60"	33"	47"	28"	108"	37.75"	11.75"	5.75"	27.5" x 29.75"	45.5" x 8.75"	22.5" x 29.75"	19.75"	21.5"	21.5"	50"	93.5"

Notes: s Equipped with spring shackle offsets (see diagram). Contact your Reading Distributor for dimensions.

Single Wheel Compartment Layout

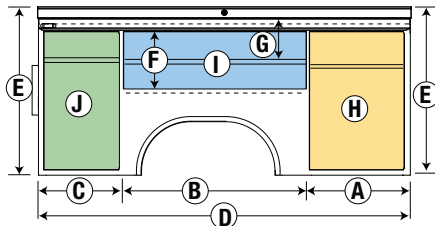



Single Wheel Rear View

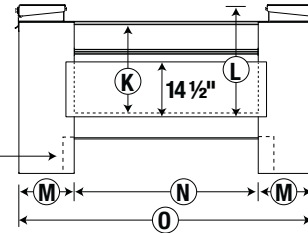

Some models equipped with spring shackle offsets (see "Models" chart)

DIMENSIONAL DATA FOR THE 132

Model	Approx. Weight		Cab-to-Axle	A	B	C	D	E	F	G	G	Approximate Compartment Clear Door Openings				Rear View
	STL LIDS	AL LIDS										I	J	K	L	M
SLUS132-DW	2,005 lbs.	1,910 lbs.	84"	36"	21"	47"	28"	132"	44.38"	19"	11"	27.5" x 33.75"	17.5" x 33.75"	45.5" x 12.75"	22.5" x 33.75"	23.88"
SLUSLP132-DW	TBD	TBD	84"	36"	21"	47"	28"	132"	37.75"	11.75"	5.88"	27.5" x 29.75"	17.5" x 29.75"	45.5" x 8.75"	22.5" x 29.75"	19.88"

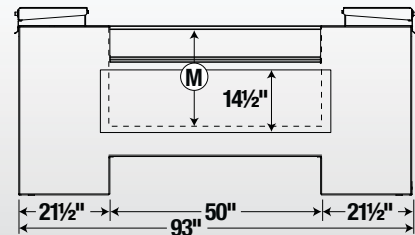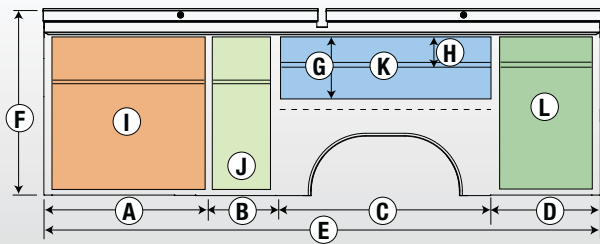

Model	Approximate Weight		A	B
	Steel Lids	Aluminum Lids		
98 SW	115 lbs.	88 lbs.	98.5"	12.125"
108 DW	158 lbs.	117 lbs.	108.5"	16"



The Quality You Expect

THE ECONOMICAL VALUE YOU DESERVE ...

- STRENGTH where it matters
- LEGENDARY quality and durability
- TIMELESS design, maximized for efficiency

Manufactured in Reading, Pa., the SL Service Body offers an impressive list of traditional Reading standard features. The SL bodies feature welded design and construction, and utilize A60 coated-weight galvanized steel throughout, including the load space floor. For extra durability, every SL Service Body moves through our exclusive E-Coat prime and powder-coat finish process, protecting it with the longest-lasting finish in the industry to prevent rust and corrosion.



STRONG | DURABLE | DEPENDABLE | VERSATILE

