

Reiten

All Aluminum Dump Bodies



Two styles to choose from ...

Both feature a smooth air flow design for greater fuel economy.

Both feature high-performance, stress resistant, hardened aluminum alloys. Alloys that are chosen for durability, wearability and fracture toughness.




***REITEN PRODUCTS are PROVEN PRODUCTS,
ENGINEERED FOR STRENGTH AND PERFORMANCE,
but BUILT to SAVE WEIGHT!***

***It's time to enter the Aluminum age . . .
with Reiten!***

Specifications

All units feature hi-performance, stress resistant, hardened aluminum alloys, chosen for durability, wearability and facture toughness.

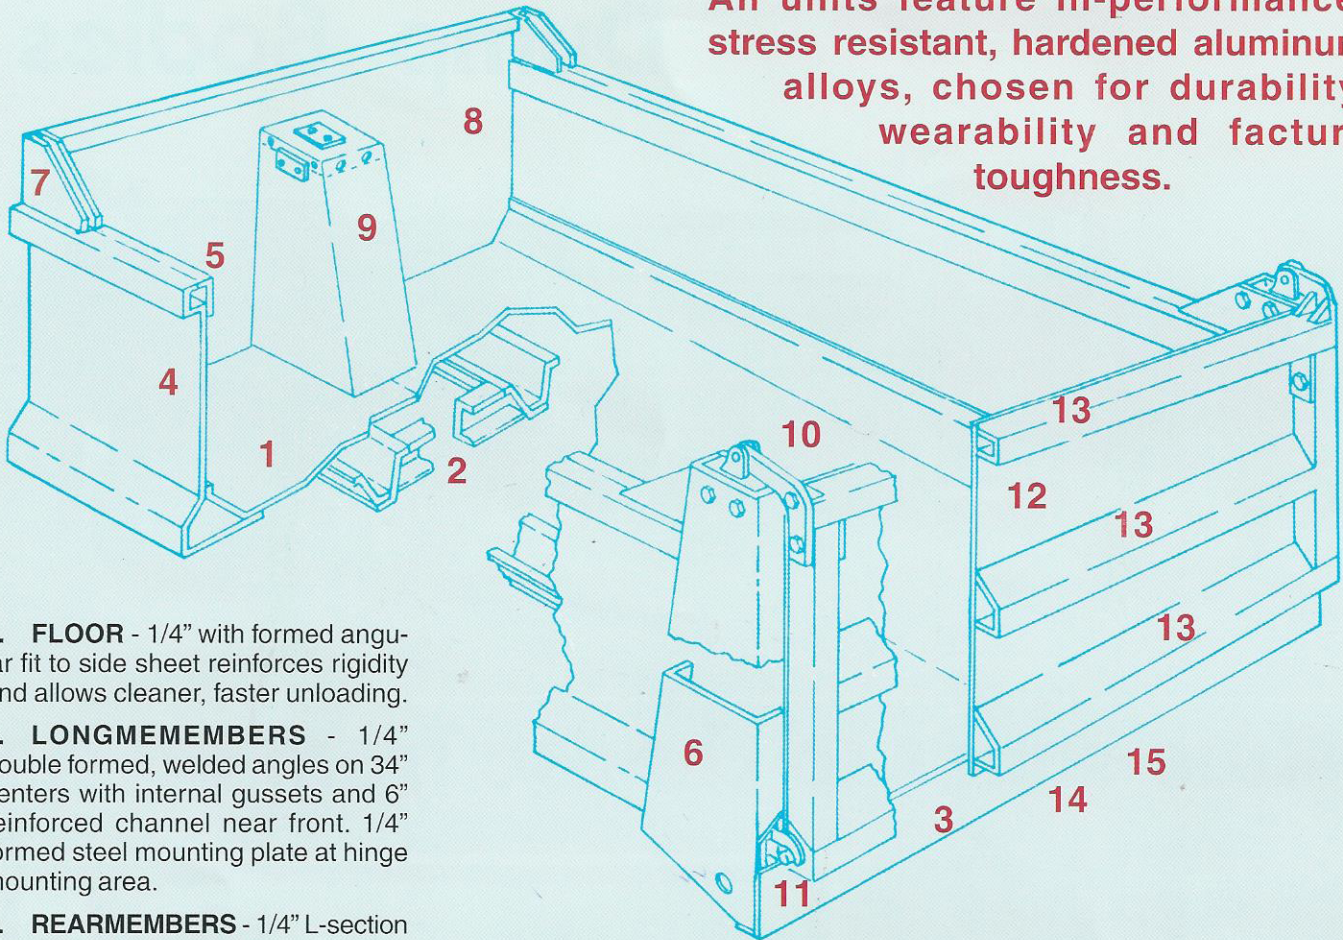

1. **FLOOR** - 1/4" with formed angular fit to side sheet reinforces rigidity and allows cleaner, faster unloading.
2. **LONGMEMBERS** - 1/4" double formed, welded angles on 34" centers with internal gussets and 6" reinforced channel near front. 1/4" formed steel mounting plate at hinge mounting area.
3. **REARMEMBERS** - 1/4" L-section 10" x 2-1/2" supports floor at tailgate opening.
4. **SIDES** - 3/16" integrally formed with self-cleaning lower rub-rail.
5. **TOP-ANGLE** - 3/16" formed into a heavy-duty 4-1/4" x 4-1/4" boxed top rail for more rigid sides.
6. **REAR CORNER POSTS** - 1/4" post with 16" bottom tapers to 10" top eliminating side buckling during spreading.
7. **SIDE BOARD POCKETS** - Provided for 2" planking allowing increased load capacity
8. **HEAD** - 3/16" front, height is variable depending upon hoist model.
9. **HOIST BRACKET** - 1/4" and 5/8" steel plate assembly is tapered and wedge fitted and then bolted to 1/4" aluminum hoist housing.

10. UPPER TAILGATE HARDWARE

Offset type hinge is flame cut from 1" steel plate and bolted to rear post and tailgate.

11. LOWER TAILGATE HARDWARE

Positive, over-center lock of 3/4" steel plate bolts to floor. 1-1/4" steel tailgate pin.

12. **TAILGATE** - 1/4" straight style, 47" x 87-1/2".

13. **TAILGATE BRACES** - 3/16" - 3" x 3" boxed channel forms top and vertical braces. Center and bottom braces are 3" deep with 4" face and 6" spread for self-cleaning.

14. **INSIDE WIDTH** - 85.5"

15. **OUTSIDE WIDTH** - 96"

MODELS AVAILABLE in lengths to 18-1/2' with side height to 48".

OPTIONS

CAP SHIELD - 19" with 12" height adjustment - bolt or weld into position.

SIDE EXTENSIONS - Double taper, full taper or straight sides.

LIGHT & WIRING KITS - Fully enclosed wiring meets state and federal standards.

TAILGATE CONTROLS - Manual or air actuated.

Reiten reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein.

Reiten, inc.

GA-2055-1100-2.5M

For questions or to place an order, please contact
HAWKEYE TRUCK EQUIPMENT at
515-289-1755 or 1-800-622-8223.