

HPT-B1 & HPT-B2 TUB BODY LINE



DuraClass HPT-B1 shown
with available accessories.



DuraClass HPT-B2 shown with
distributor-added accessories.



HAWKEYE TRUCK EQUIPMENT
515-289-1755 or 1-800-622-8223

Durability that *Means Business*



**DURABILITY
THAT MEANS
BUSINESS**

BUILT RIGHT

DuraClass **HPT-B1 and B2**, "the TUB" body line, are lightweight champs in a heavyweight world. Semi-elliptical bodies using high tensile steels, crossmemberless understructure, and a body sidewall without extra bracing add up to an exceptional payload-to-weight ratio. The rounded floor and low center of gravity give these bodies the strength and stability for heavy hauling. Loads are discharged cleanly from the curved body shell.


HPT-B1



HPT-B1 SPECIFICATIONS					
Inside Length	14'	15'	16'	17'	18'
Width (inside / outside)	84" / 96"				
Body Capacity, Yards	10-12	12-14	15-17	16-19	17-20
Material	3/16" Hi-Tensile Steel				
Side Style	Elliptical, closed fender				
Side / Front / Rear Heights (in)	38 / 54 / 44	38 / 54 / 46	44 / 56 / 52	44 / 64 / 52	44 / 68 / 52
Hoist Model	HPT53-120	HPT53-130	HPT53-140	HPT53-150	HPT53-160
Understructure	Crossmemberless 10" I Beam Longbeams				
Weight (including hoist) (lbs)	4309	4790	5171	5446	5600



DuraClass bodies come with full depth corner posts and enclosed tailgate hardware, another premium feature you won't find anywhere else in the industry.

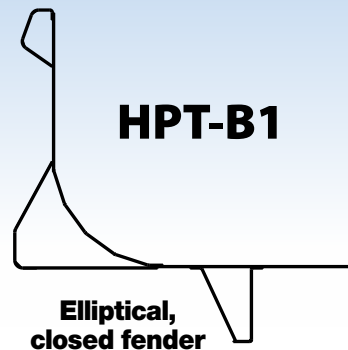

BODY OPTIONS

- Aluminum (Cabshields & Tailgates only)
- Sloped Tailgate
- Reverse Asphalt Taper
- Sloping Side Panels
- Hi-Lift Tailgate, Air or Hydraulic
- Dual Action Side Swing Tailgate
- Body Side Steps and Handles
- Tarp Rails and Walk Rails
- Variety of Sliding Door Options
- Custom Side and Tailgate Heights
- Air Operated Hoist Controls
- Variety of Cylinder/Doghouse Configurations
- Stainless Steel Bodies available
- Additional Options Available

HPT-B2



HPT-B2 SPECIFICATIONS

Inside Length	10'	11'	14'	15'	16'	17'	18'
Width (inside / outside)	84" / 96"						
Body Capacity, Yards	6-8	6.6-9	10-12	12-14	15-17	16-19	17-20
Material	3/16" AR 400		3/16" Hi-Tensile Steel				
Side Style	Elliptical, open fender						
Side / Front / Rear Heights (in)	28 / 38 / 38		38 / 54 / 44	38 / 54 / 46	44 / 56 / 52	44 / 64 / 52	44 / 68 / 52
Hoist Model	1821		HPT53-120	HPT53-130	HPT53-140	HPT53-150	HPT53-160
Understructure	Crossmemberless 10" I Beam Longbeams						
Weight (including hoist) (lbs)	2313	2500	4126	4590	4954	5212	5350

HPT-B2

**Elliptical,
open fender**

**Greaseable
Rear Hinge
with Optional
Removable Pin.**



HPT HOISTS

Frameless Head-Mount Design

HPT Benefits:

- **Maximized Payload** with a lighter weight design
- **Increased capacity** as a result of high-pressure hydraulics
- **Low maintenance design** with U-cup cylinder seals that never need adjustment
- **Premium** rear hinge design with wide pedestal style, lubricated hinges and solid pins
- **Better stability** with low center of gravity and strong pin design
- **Increased productivity** with faster cycling, both raising and lowering of body
- **Improved longevity** with hard chrome plated hoist sleeves



Standard Features

- Two body props
- Fully welded construction

DuraClass 336 Protection...

Rely on our promise to you, 36 months warranty on the 3 most important components of your HPT hydraulic system- the pump, valve and cylinder- if our materials or workmanship fail.

HOIST MODEL	NTEA CLASS	WEIGHT** (LBS)	CAPACITY* (TONS)																	
			10'		11'		12'		13'		14'		15'		16'		17'		18'	
Body Length			12"	6"	12"	6"	12"	6"	12"	12"	18"	12"	18"	12"	18"	12"	18"	12"	18"	
HPT53-90	70	670	29.3	23.1	25.5															
HPT53-110	70	725				23.9	26.7													
HPT53-120	80	745						23.3	25.6	23.7	26									
HPT53-130	80	750										23.4	25.3							
HPT63-120	110	985						38.4	42.3	39.1	42.9									
HPT63-130	110	995										38	41.2							
HPT63-140	120	1020												38.1	41.1	36.5	38.8			
HPT63-150	120	1040														38	40.6	36	38.2	
HPT63-160	120	1060																37	39.4	

*Capacity is based on water-level load and approximately 50° dump angle.

**Weight is less oil and PTO

All bodies shown with some optional equipment. Models and options are subject to change without notice.



CONTACT YOUR DISTRIBUTOR

HAWKEYE TRUCK EQUIPMENT
515-289-1755 or 1-800-622-8223